

## JCW-320G

25mm<sup>2</sup> Pneumatic Terminal Crimping Machine



### Features


- Pneumatic crimping machine, 25KN crimping force
- 4 sets of the crimp die sets, fast crimp die sets changeover
- 35 mm<sup>2</sup> bootlace ferrule; 16 mm<sup>2</sup> uninsulated terminal

### Technical Data

<b>Cable range</b>	Bootlace ferrule: 35 mm <sup>2</sup> Uninsulated terminal: 16 mm <sup>2</sup>
<b>Crimping force</b>	25 KN
<b>Crimp dies sets</b>	4 sets
<b>OEM</b>	Yes
<b>Activation</b>	Foot pedal
<b>Air supply</b>	0.4 - 0.7 MPa ( clean and dry air )
<b>Dimensions</b>	L 275 x W 128 x H 145 mm
<b>Weight</b>	7 KG

## JCW-320H

Heavy-duty Copper Tube Lug Crimping Machine

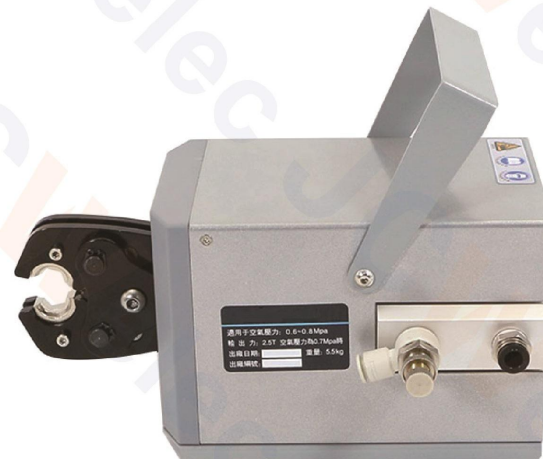

### Features

- Professional lug crimping machine
- 25KN crimping force, 50 mm<sup>2</sup> SC / RNB cable lug
- 12 sets of the crimp die sets, hexagon / Indent crimping

### Technical Data

<b>Capacity</b>	50 mm <sup>2</sup>
<b>Crimping force</b>	25 KN
<b>Crimp dies sets</b>	12 sets
<b>Air regulator</b>	Yes
<b>OEM</b>	Yes
<b>Activation</b>	Foot pedal
<b>Air supply</b>	0.6 - 1.0 MPa ( clean and dry air )
<b>Dimensions</b>	L 275 x W 128 x H 145 mm
<b>Weight</b>	7 KG